
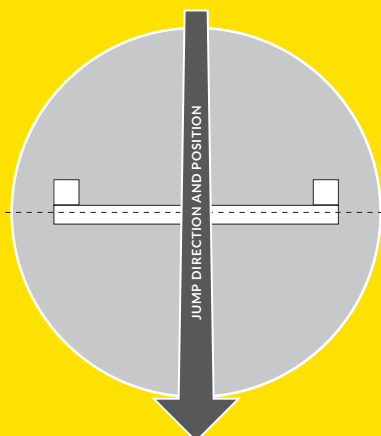


# Post & Rail Adjustable Kit - 80325

**mimSAFE**  
mimclip.mimsafe.com

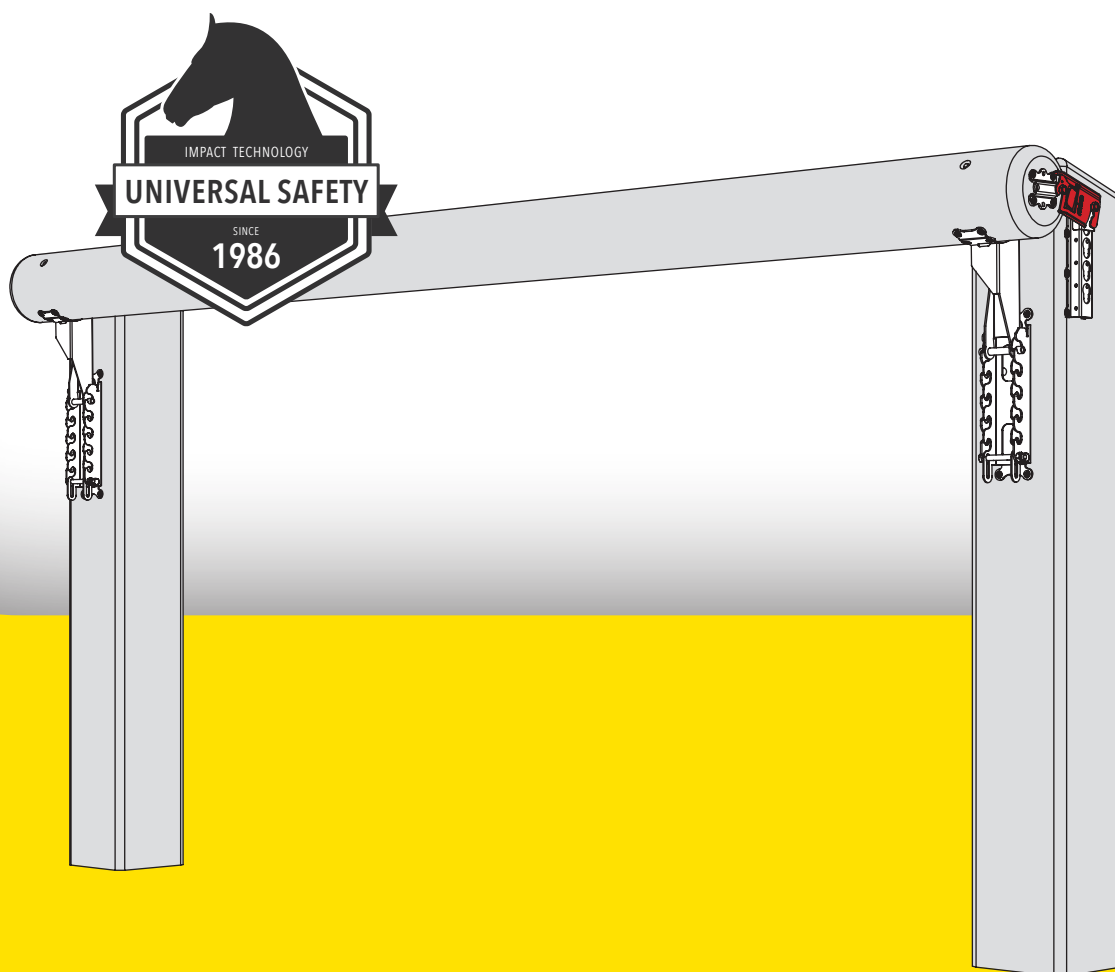

ASSEMBLY AND OPERATION INSTRUCTIONS

## POST & RAIL ADJUSTABLE KIT

MIMCLIP SYSTEM




APPROVED

INFORMATION ABOUT THE POST & RAIL ADJUSTABLE KIT

The Post & Rail Adjustable Kit has been designed and developed specifically to greatly reduce the risk of rotational falls. The most important element of this kit is that it will not break the fence or risk injury to the horse if hit vertically. The rail is only released when impacted horizontally by the horse. The risk of a resulting rotational fall is thus reduced.


### FENCE DIMENSIONS

POST



MAXIMUM SIZE


10	inch
250	mm



MAXIMUM SIZE

10	inch
250	mm

RAIL



MAXIMUM LENGTH

13.1	ft
4000	mm

MAX WEIGHT WITH RED CLIP

265	lb
120	kg

MAY ONLY BE EXCEEDED BY 25%

MAX WEIGHT WITH YELLOW CLIP

297	lb
180	kg

MAY ONLY BE EXCEEDED BY 25%


(Yellow clips not included in this assembly kit)  
order yellow clip spare parts

It is essential to follow the recommended instructions on the fence for the correct function. All WEIGHTS may be exceeded by no more than 25% of the relevant maximum weight as specified above. There are NO MINIMUM WEIGHTS.

For your own safety and that of others please note the following step by step advice for correct preparation and installation. It is important that you follow your own health and safety requirements when constructing this kit.

Ensure that you have all parts of the Post & Rail Adjustable Kit.  
Be aware of the risk of injury when handling heavy rails,  
posts and the tools for mounting.

WARNING!






Jumping direction




**IMPORTANT**


The posts must be:  
**PARALLEL,  
& FRONTAL ALIGNED &  
SECURED TO THE GROUND**

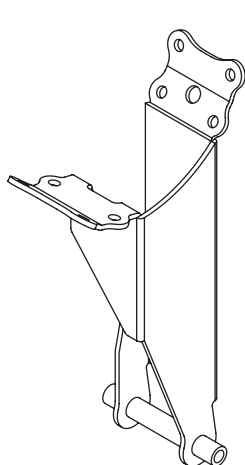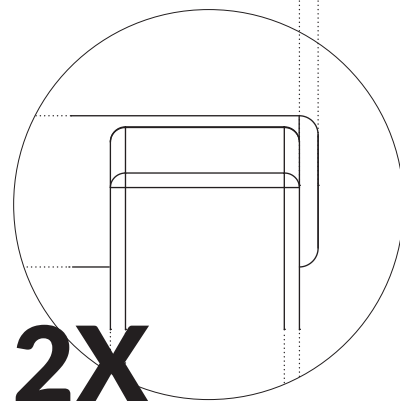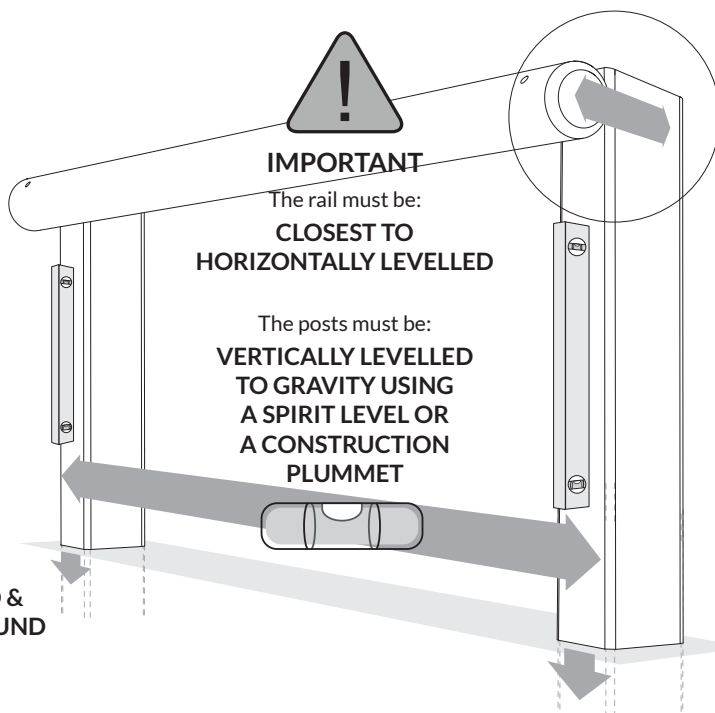

**A** FS65B  
Part no 2x

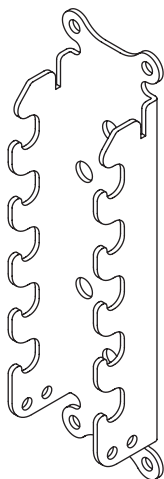


**B** F65E  
Part no 2x



**C** F65F  
Part no 2x



**D** F65H  
Part no 2x



**E** F65G  
Part no 2x





**F** F70A  
Part no 2x





**G** F18C  
Part no 6x

M-SM6x70 2X	M-MM6Ny 2X	M-SM10x30 2X	M-MM10Ny 2X	M-BR11x22x2s 4X	M-BR11x28x2s 2X	M-SM10x100 2X	M-MM10Ny 4X	M-TS10X90 2X


STEP  
**1**

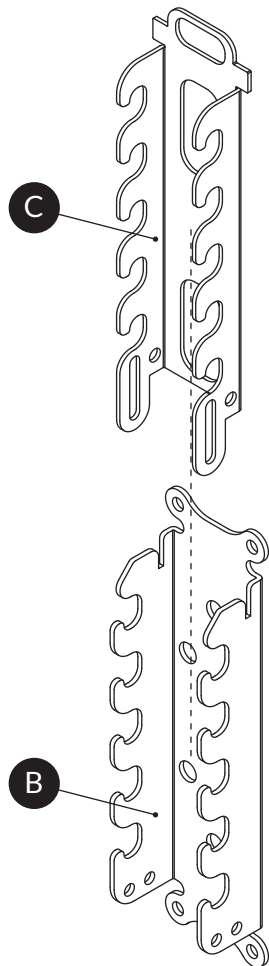

**2X**

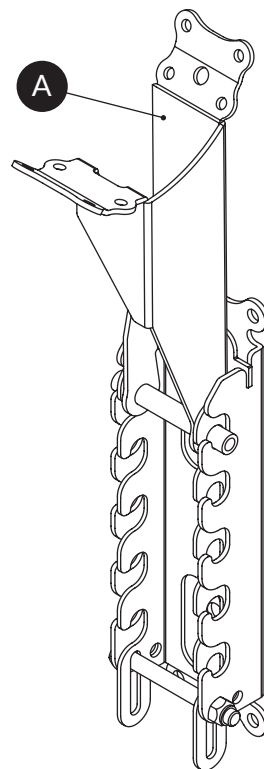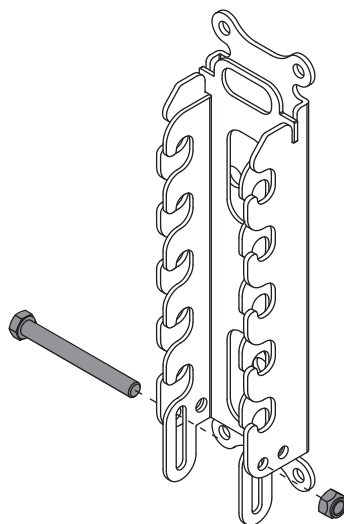


STEP  
**2**

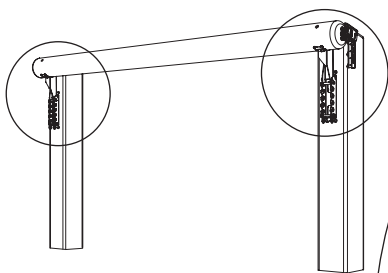

**IMPORTANT**



The **A, B & C** pieces must be:

**PARALLEL, VERTICALLY LEVELLED  
& CLOSEST TO HORIZONTALLY ALIGNED  
TO EACH OTHER**

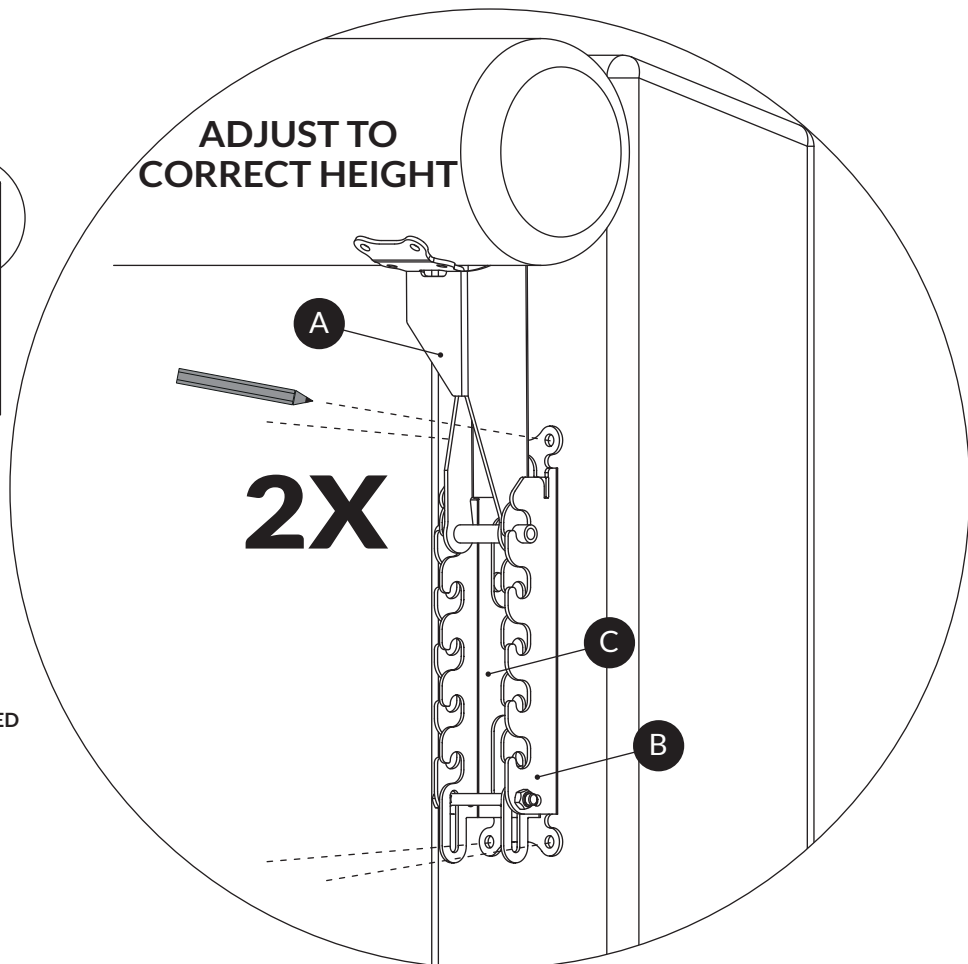



STEP  
**3**

**2X**

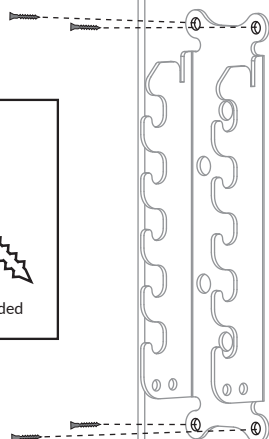

STEP  
**3\***



\*alternative

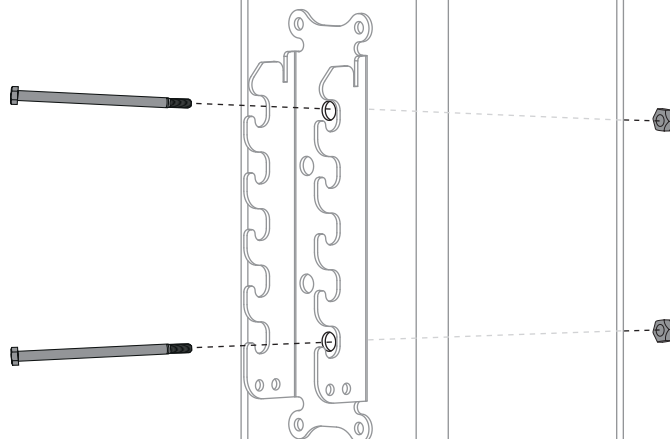


**2X**

STEP  
**4**


**2X**

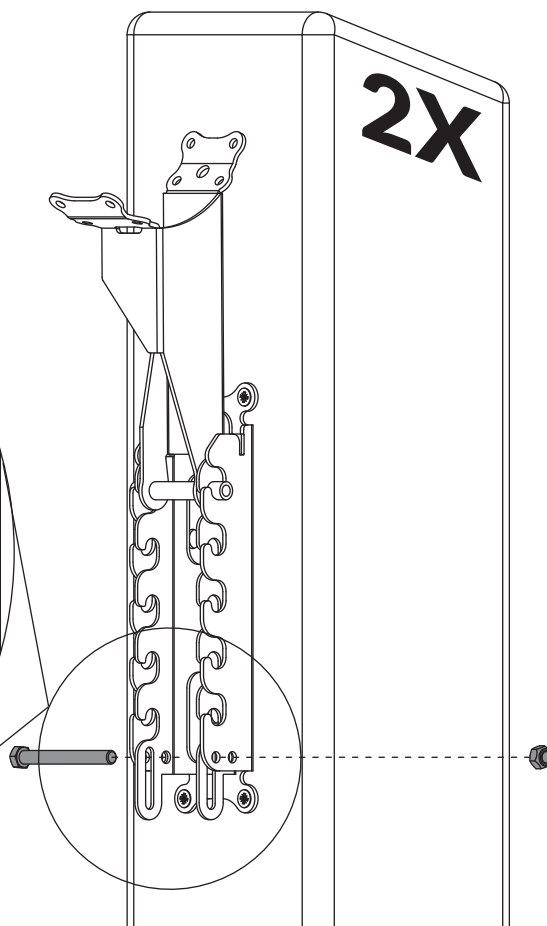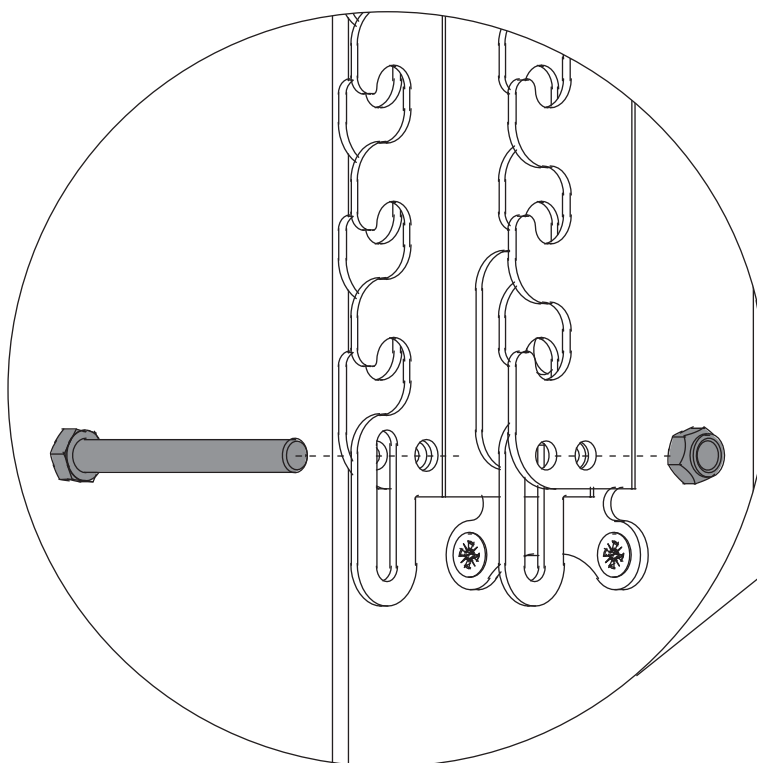


STEP  
**5**

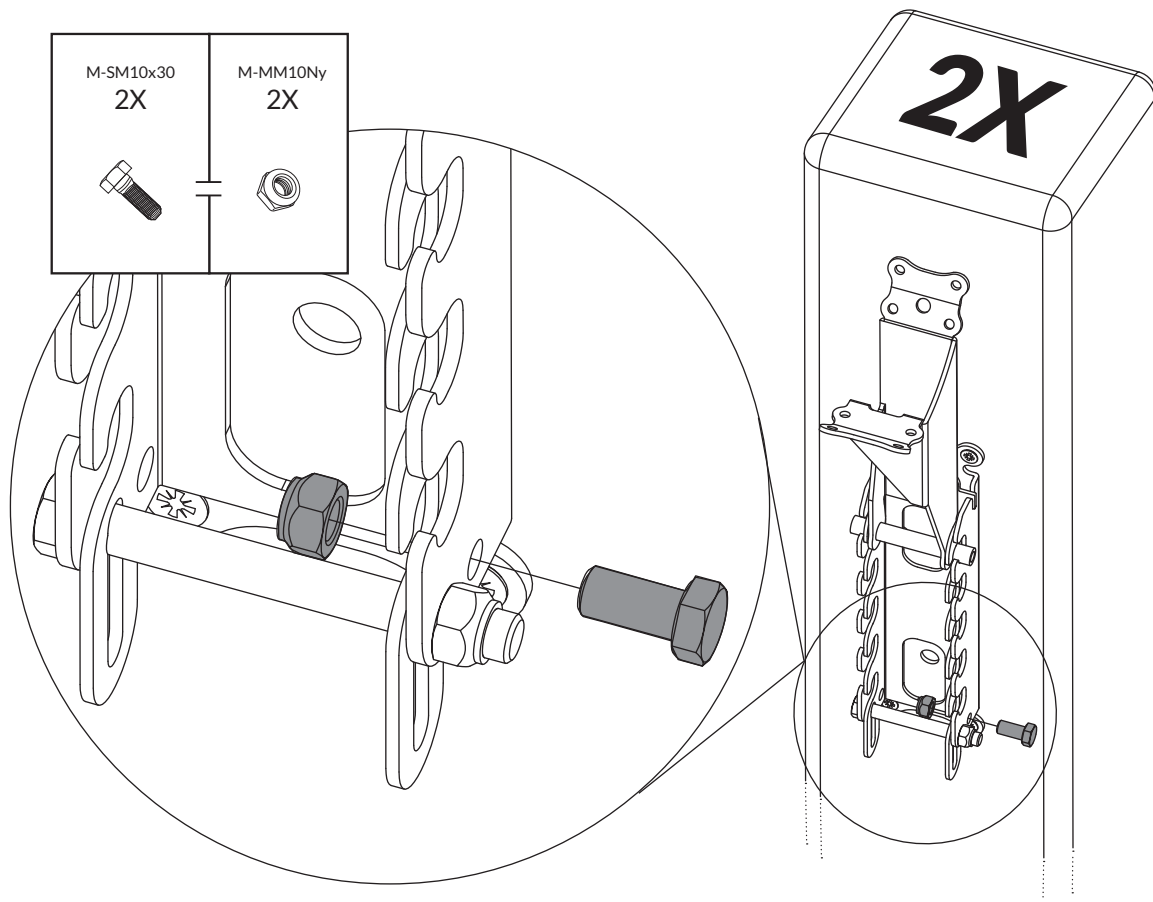


STEP  
**6**

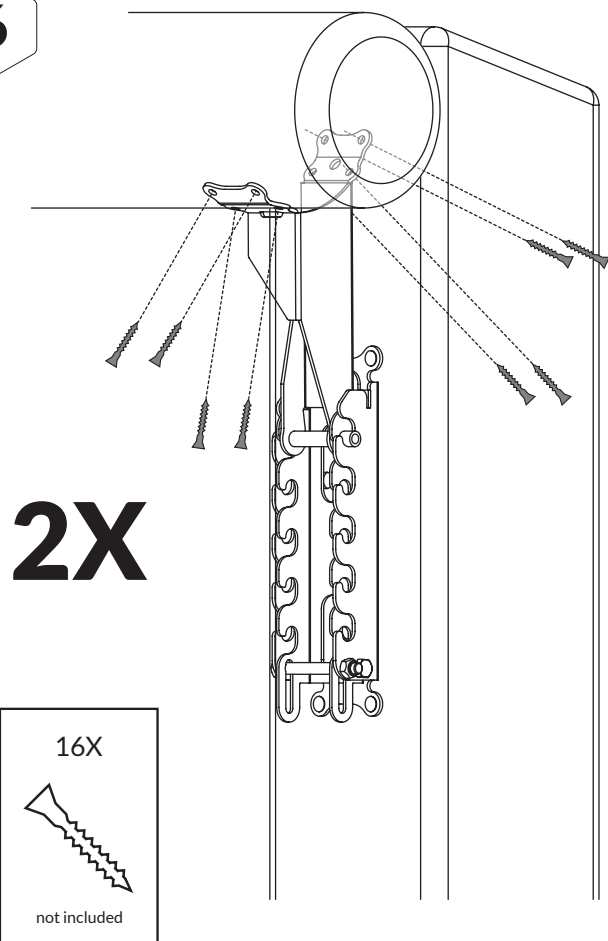



STEP  
**6\***  
\*alternative

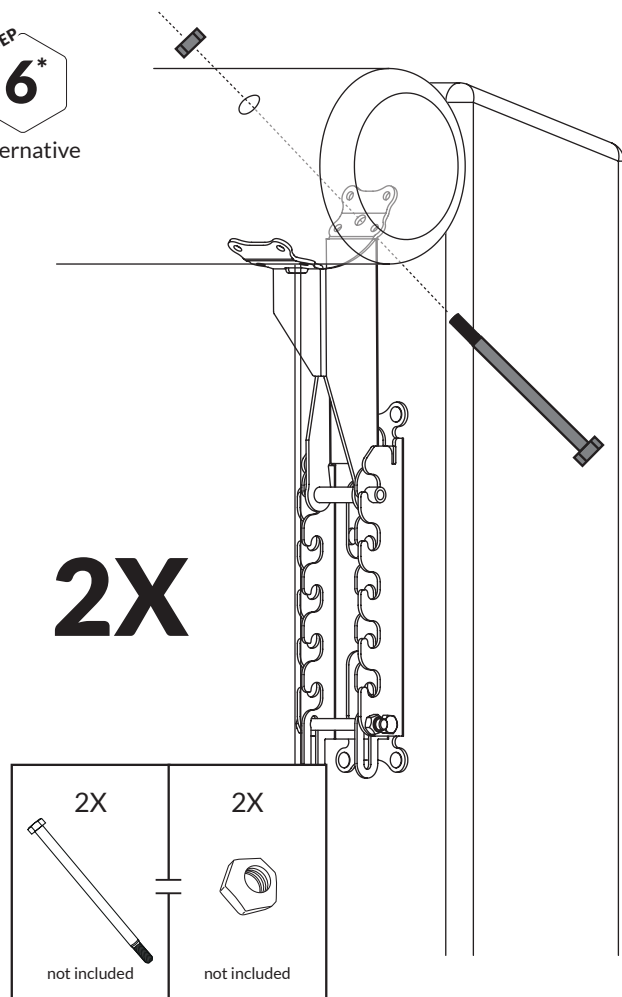

STEP  
7



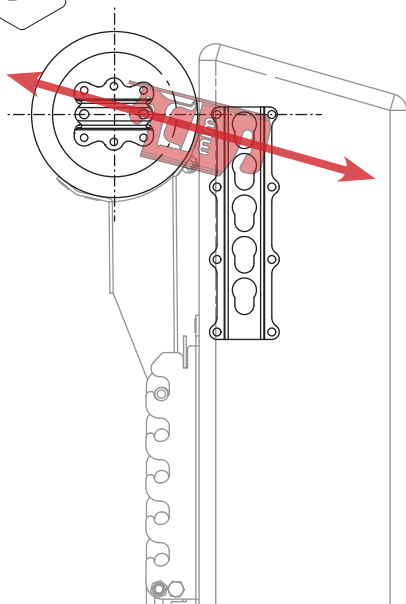


2X

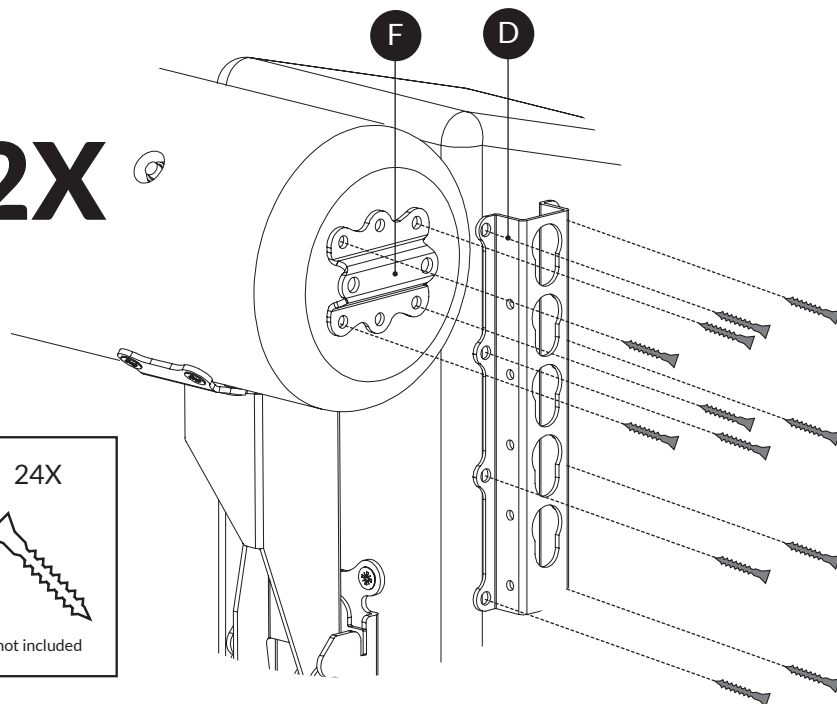




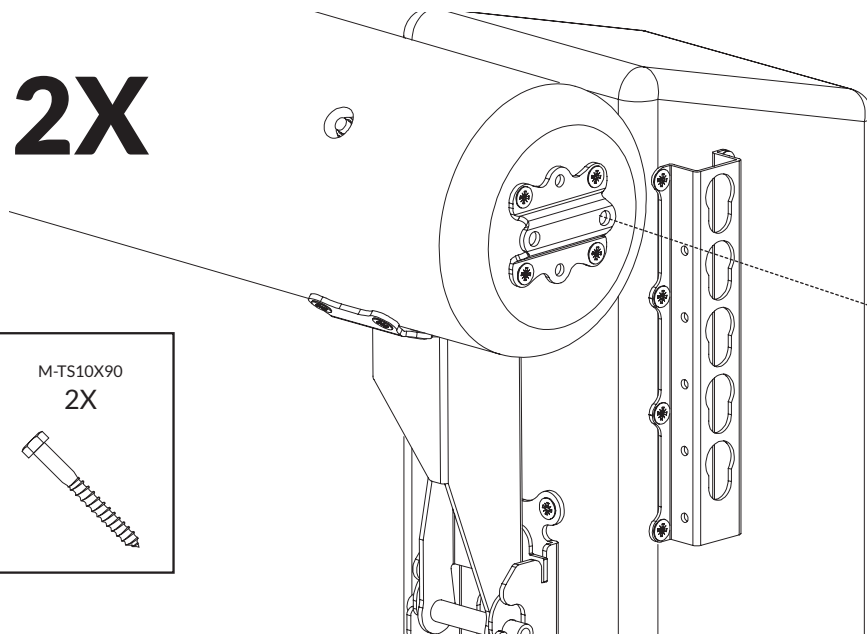


STEP  
8

2X

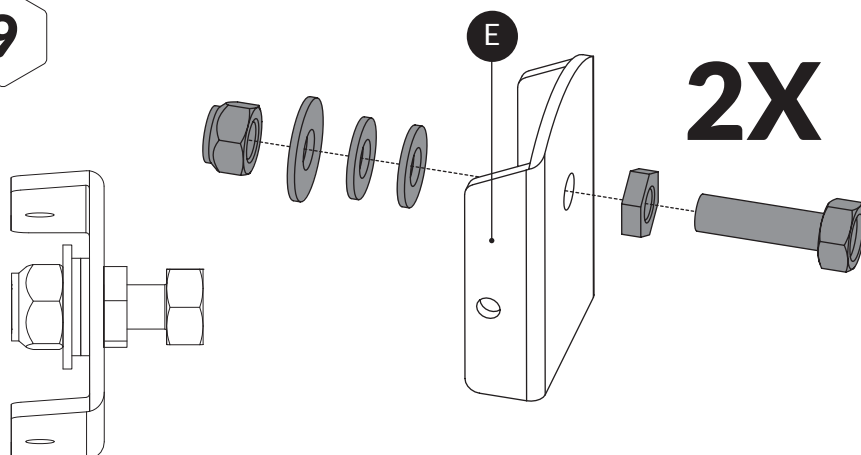


STEP  
9



<p>M-SM10x30 2X</p> 	<p>M-BR11x28x2s 2X</p> 	
<p>M-MM10Ny 2X</p> 	<p>M-BR11x22x2s 4X</p> 	<p>M-MM10Ny 2X</p> 



STEP  
**10**

**2X**

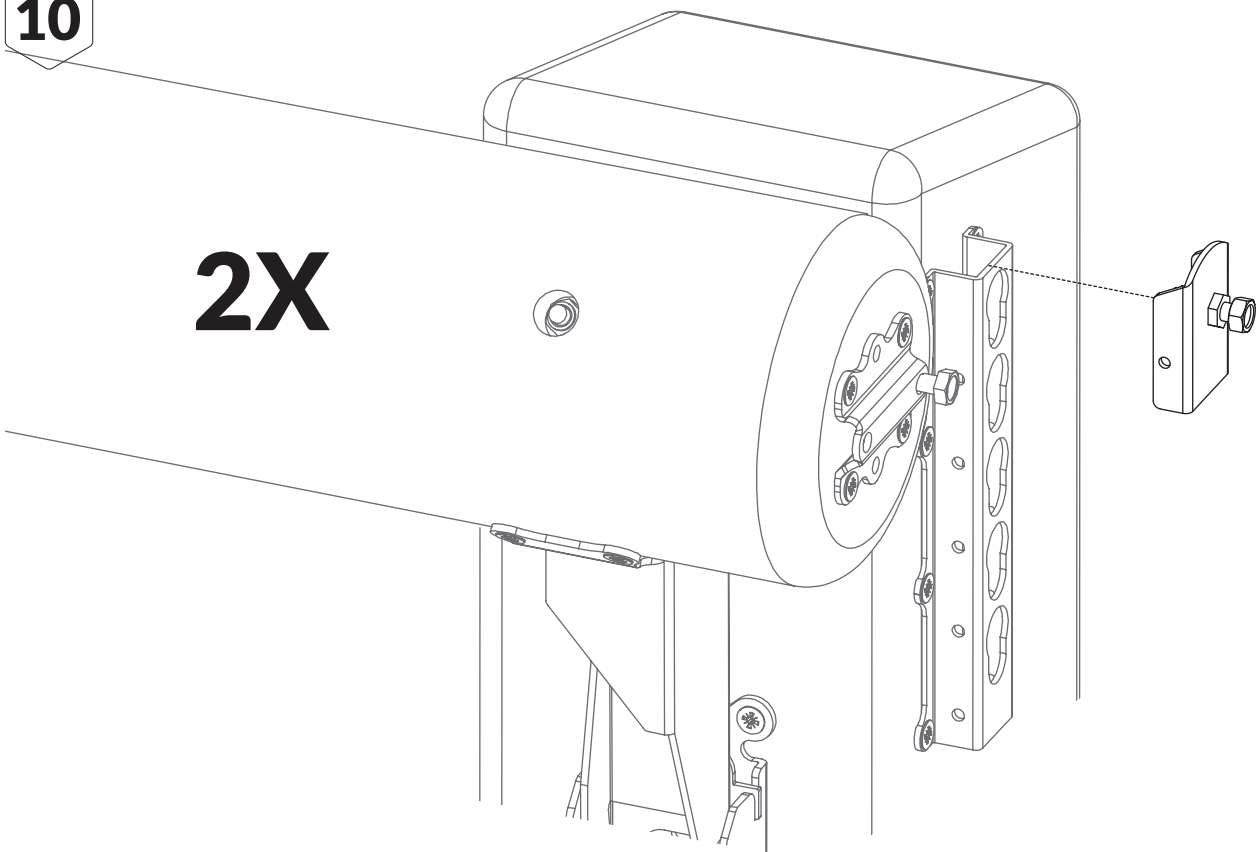


STEP  
**11**


**2X**

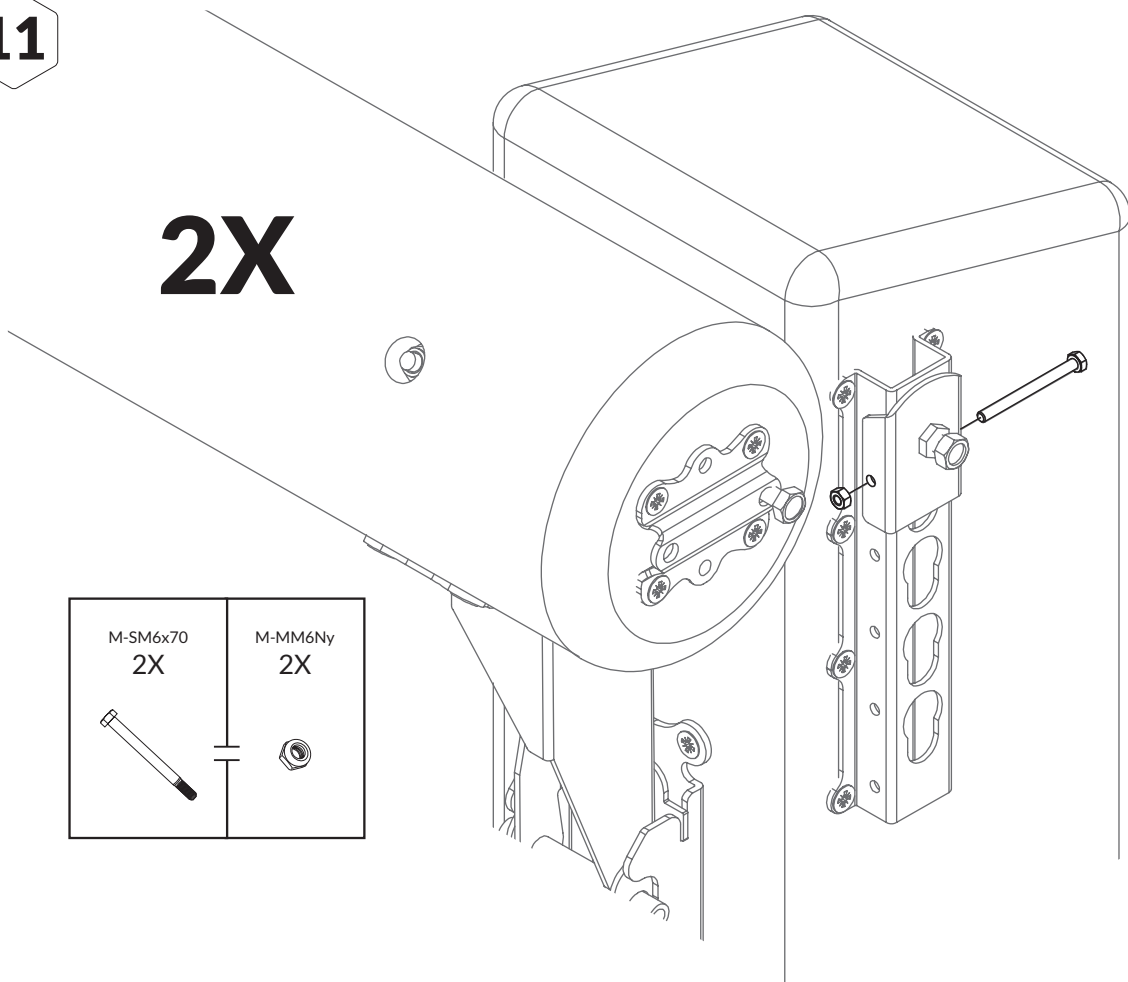



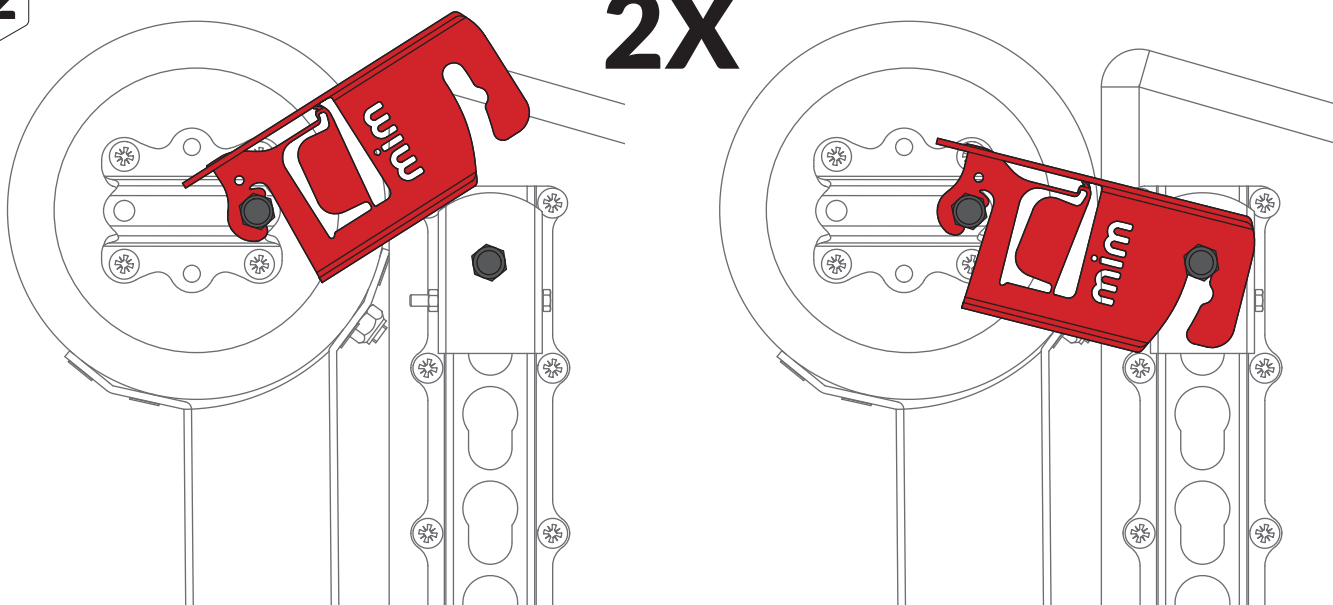

The flag is bent when fatigued.

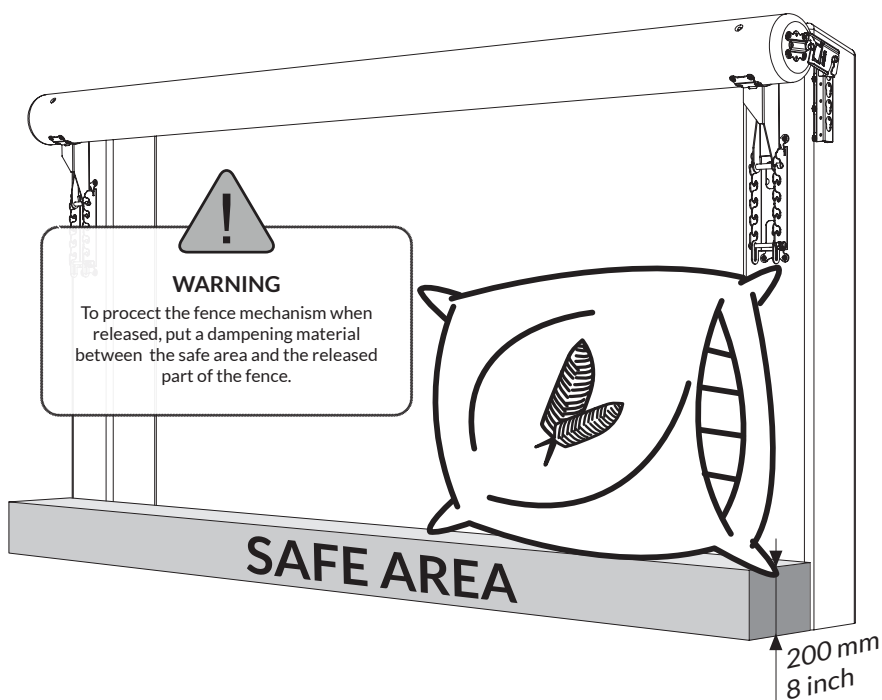

### The advantages of the MIMclip

The MIMclip (F18C) breaks on impact. The flag is bent when the clip is exposed to fatigue. In both cases the clip must be replaced. The top section is connected to the post with a hinge that makes the fence easy to reconstruct. This saves time, guarantees fair and correct judging for riders and contributes to the overall safety of the sport.

### The advantages of the Post & Rail Adjustable Kit

1. It has been produced with safety being the first and foremost important factor.
2. Reduces the possibility of rotational falls.
3. FEI approved number FEI11SWE.
4. Controlled movement of fence during release.
5. Reconstruction time is less than 30 seconds.
6. The parts are made of powder coated steel and can be left outside, no maintenance is required.
7. The very highest quality of product from Sweden.